

automatic L sealers

Perfection is attention to detail. L sealer with vertical sealing bar (Goodbye scissor closure system). The L sealer concentrates all possible comforts that make her special even if she is so simple. No more packing stress... enjoy it and relax.

>> general features

The main feature of these machines is the L-shaped sealing bar. The single vertical bar which can guarantee the same pressure in all parts of the film replaces the old scissor-shaped bar. L seal bar vertical. No scissor system! Preferred Packing machines can be equipped with different types of infeed and outfeed conveyors: flighted conveyors, conveyors with pushers, intralox, etc; pushers, feeders (shuttle or rotary), stackers, shrink tunnels and many other accessories up to forming a complete line.

>> specific features

The bar, which is only 10 mm thick, enables the user to save a lot of film (the quantity of film welded around the product is very limited. As a result, the package is well closed and the wrapping is tight at the same time). These machines can process both polyolefin and polyetilene with an optional bar. They occupy very little room (combo version with tunnel on the same frame). Available also the economic "Eco" version.

>> details



The L vertical bar which guarantees the same pressure on the film welding replaces the old scissor system. For a uniform weld.




Bar width just 1 cm, vertical movement and not scissor, uniform sealing, low film consumption, lower costs for shrinking.



Available separate versions with stand alone L sealer separated from the tunnel.



Easy change of format: center sealing and triangle-inverting head motorized. Height up 400 mm.

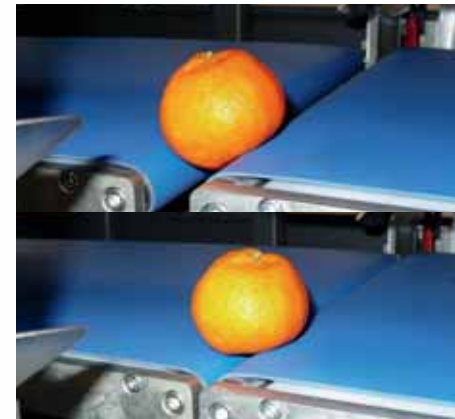

Kissing belt mounted as standard in all our machines to pack smaller and round /irregular shape products.



The perfection of the Preferred Range in economic and "combo" version.



Film dispenser unit and film wind up unit both in front of the machine easy to be reached. Sliding door.



Machine closed to the wall, to save space.



High quality components, ISO certificated.

PREFERRED PACKAGING ITALY
leader in the manufacturing packaging equipment

**DM
PACK**

>> **FLO**


automatic L sealers



GB

FLO

automatic L sealers

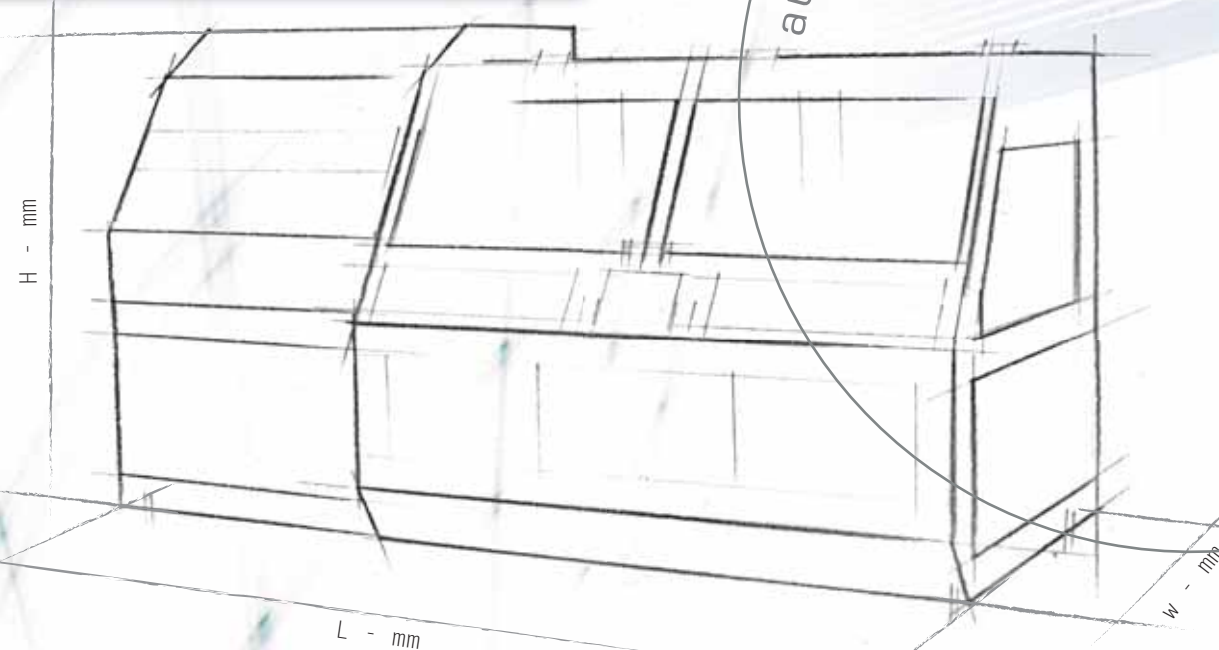

>> technical features

MOD.	530	530T	530CS	530CST	560CST	560T	560CS	560	560TECO	790CS
Sealing dimensions	450x600 mm	450x600 mm	450x600 mm	450x600 mm	500x650 mm	500x650 mm	500x650 mm	500x650 mm	500x650 mm	750x950 mm
Max product's width	350 mm	350 mm	350 mm	350 mm	420 mm	420 mm	420 mm	420 mm	420 mm	700 mm
Max product's length	550 mm	550 mm	550 mm	550 mm	650 mm	650 mm	650 mm	650 mm	650 mm	950 mm
Max product's height	150 mm	150 mm	240 mm	170 mm	200 mm	170 mm	240 mm	200 mm	150 mm	240 mm optional up to 400
Film width	550 mm	550 mm	550 mm	550 mm	650 mm	650 mm	650 mm	650 mm	650 mm	950 mm
Film roll diameter	350 mm	350 mm	350 mm	350 mm	350 mm	350 mm	350 mm	350 mm	350 mm	350 mm
Working height	900+/- 50	900+/- 50	900+/- 50	900+/- 50	900+/- 50	900+/- 50	900+/- 50	900+/- 50	900+/- 50	900+/- 50
Machine size LxWxH (mm)	1715x1200x1450	2700x1300x1450	1715x1200x1450	2700x1300x1450	2700x1300x1450	2700x1300x1450	1715x1200x1450	1715x1200x1450	1715x1200x1450	2300x2000x1550
Weight	500 Kg	700 Kg	550 Kg	750 Kg	750 Kg	700 Kg	550 Kg	600 Kg	600 Kg	700 Kg
Speed	45 p/min	45 p/min	45 p/min	45 p/min	45 p/min	45 p/min	45 p/min	40 p/min	35 p/min	35 p/min

VERSION T: combined with shrink tunnel. VERSION CS: with center sealing.

>> Available in COMBO version; combined with shrink tunnel or separate version.



Vertical L bar with only 10 mm profile for a fine and high quality sealing. Possibility to work with different kind and quality of films.



Position of the Center sealing & inverting head adjustable by the touch screen with motors. Simple & fast change of format.



Sliding door with easy access to film dispenser and wind up unit.