


VELTEKO

VERTICAL  
PACKAGING  
MACHINE

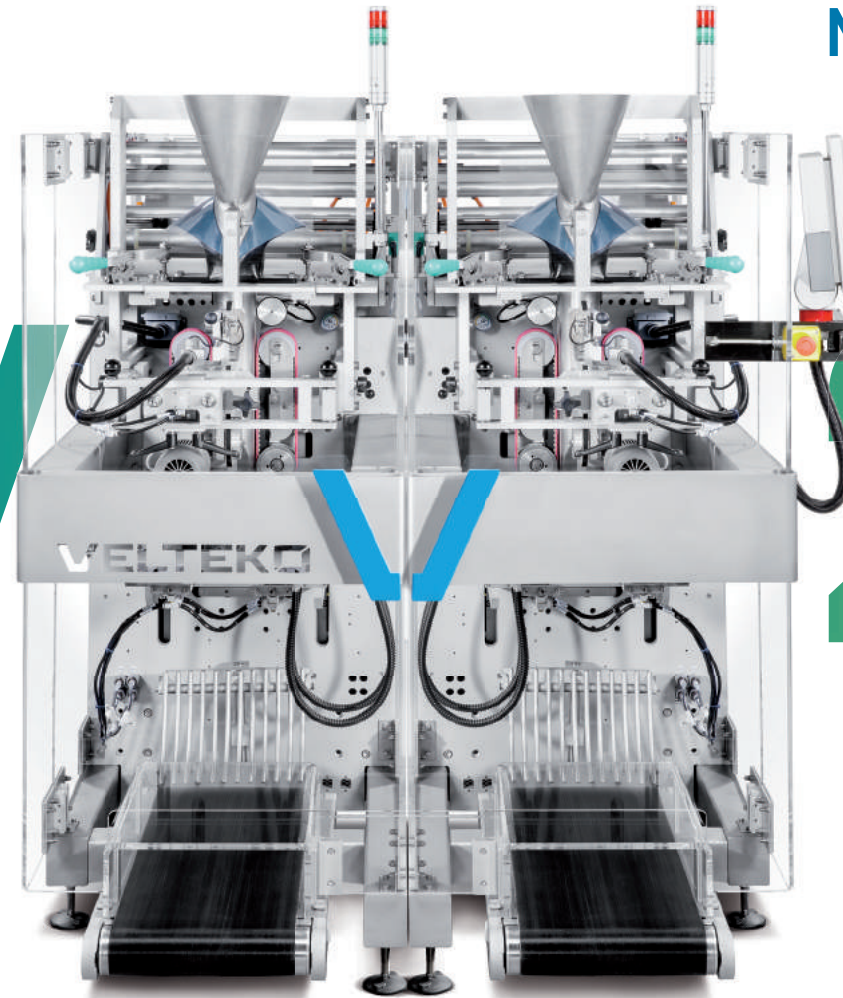

HSV 210

SLIM



The HSV210-SLIM series of vertical packaging machines is specially designed for packaging snacks and small-pieced products into pillow bags. It delivers

## **THE HIGHEST POSSIBILITY OF OPTIMIZING**

all necessary conditions for creating high-quality seals at high speed.






Tight and  
good-looking  
seals

Maximum speed of  
**400** bags/min  
with the twin version

**750 mm**  
machine width

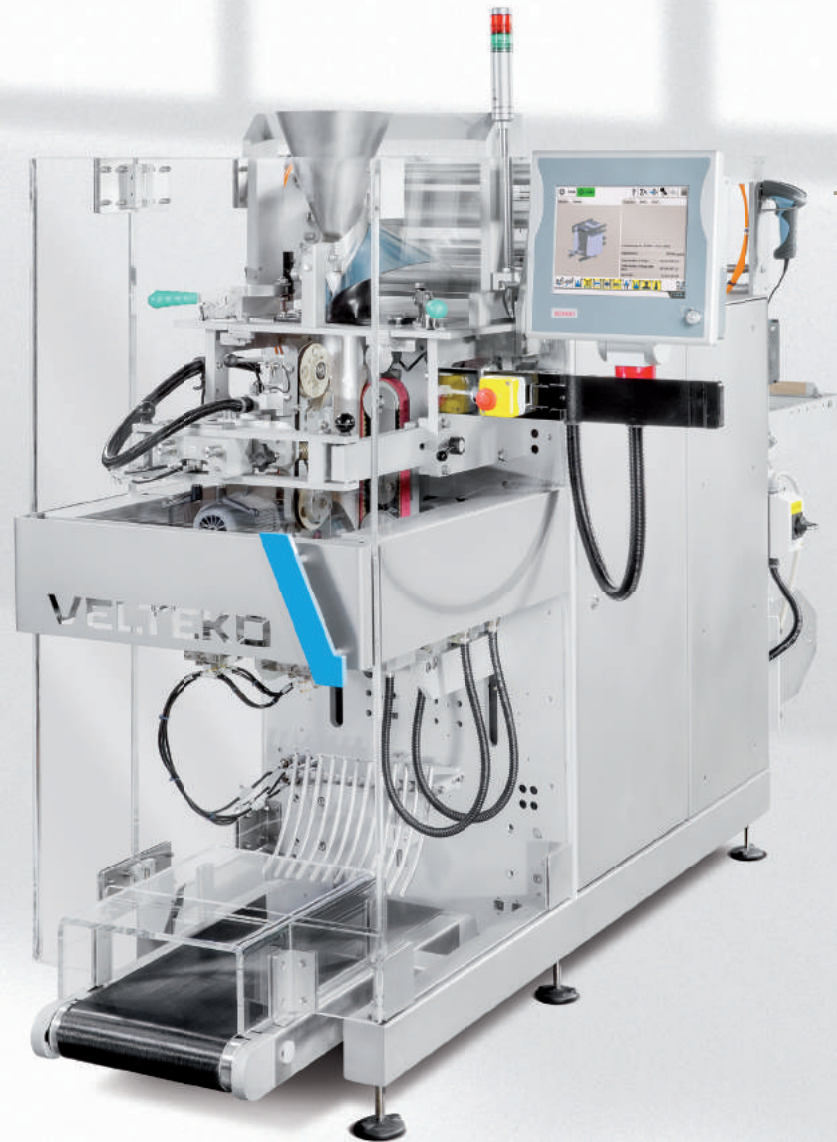

Ease  
of operation

**VELTEKO**  
**Dataservice**  
*Remote communication  
with your machine*

Easy  
to maintain



# Tight and good-looking seals


## VELTEKO Powerseal Technology

The special Powerseal mechanism drives the cross sealing jaws, which exert the necessary force to achieve perfect seals with a wide range of films.



## VELTEKO motion-controlled jaws

Sophisticated motion control of the simultaneous cross sealing jaws allows for maximum sealing time at high speed.

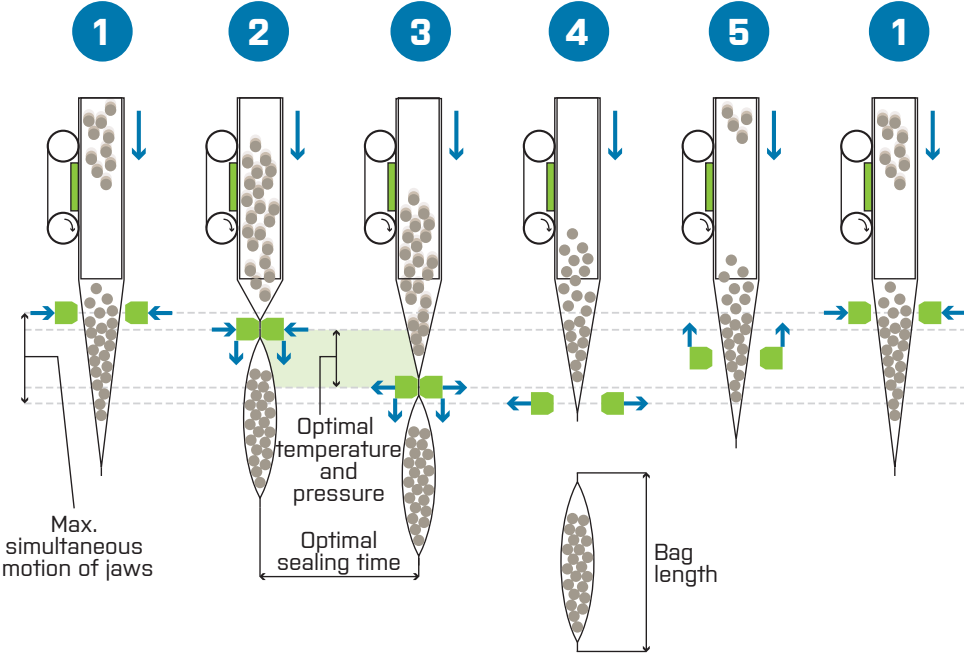



# Ease of operation

## Human-machine interface

For intuitive setting of the machine's operational parameters.


- ❑ A powerful industrial PC with a large color touch screen.
- ❑ Customizable control via icons or buttons with text descriptions.
- ❑ Assistance in choosing operating parameters.
- ❑ 500 memory settings for operating parameters (programs) with export and backup.
- ❑ Possibility of automatic selection of programs by scanning a barcode.
- ❑ Identification of the machine operator via card or RFID chip.
- ❑ User manual, wiring diagram, etc. can be accessed on the terminal's touch screen.
- ❑ Image Manager - Import, export, and delete images via the terminal and even capture images from the system's camera.
- ❑ Video Manager – Upload and playback of videos.
- ❑ Extensive help section.
- ❑ Dataservice Visual.



## VT+ Modules (Versatile Technology Plus)

VT+ modules simplify setup of film unwinding features when changing format and thus reduce demands on the skills of the operator.

- ❑ **Unwinding packaging film** roll automatically adjusts all set operating parameters of the machine.
- ❑ **Position of foil edge sensor and photo cell.** Position adjustable by servomotor. Position setting can be saved to memory.
- ❑ **Positions of film rollers.** For location of print data (label) and for adjusting the entrance angle of the film on the collar. Electronically monitored. Position setting can be saved to memory.

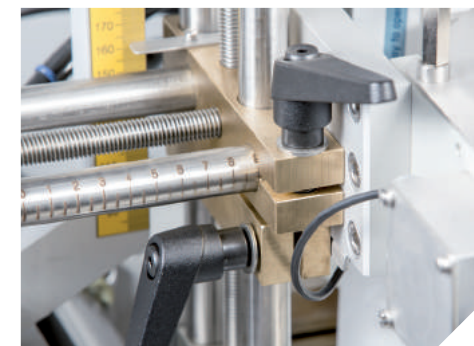


## Dials or gauges

All manual equipment comes with dials or gauges to ensure consistent settings.




# Pillow bag

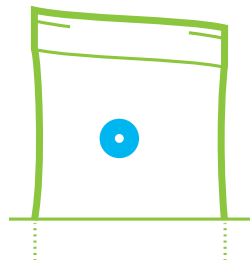

INTERNAL VALVE



LABEL




CROSS ZIP



CARRY HANDLE




EURO SLOT

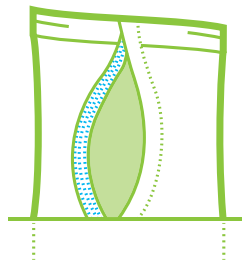

RECLOSABLE FLAP

# VELTEKO Dataservice

Dataservice Support

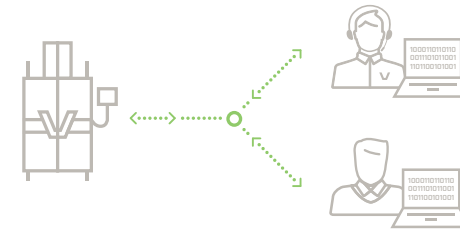

Dataservice Visual



Dataservice OPC




# Easy to maintain

- ▣ Dataservice support.
- ▣ Monitoring of service intervals, depending on the type of machine operation.
- ▣ Extensive self-diagnostics and monitoring.
- ▣ Ability to set access rights to individual controls.
- ▣ Sensors with connectors for easy replacement.
- ▣ Interactive manual and spare parts catalogue for each specific machine configuration.
- ▣ Automatic check for pneumatic leaks.
- ▣ Support from VELTEKO's Service Center.



# 750 mm machine width

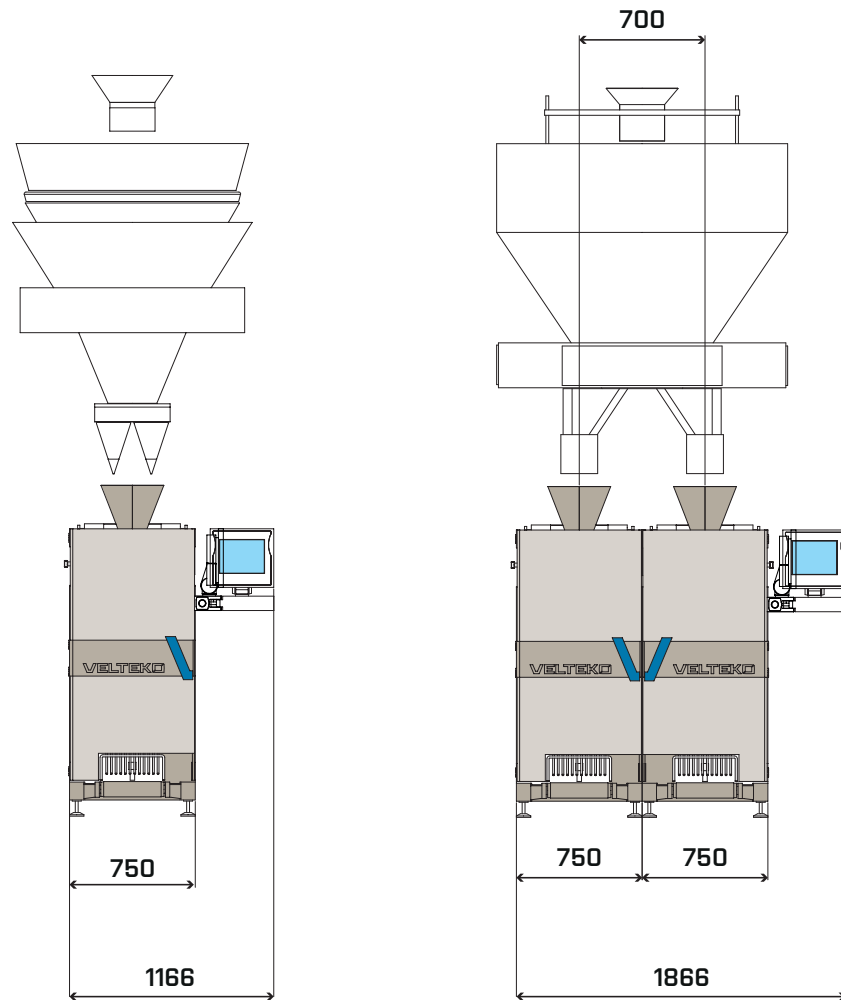


HSV210-SLIM

HSV210-SLIM-TWIN

## Technical Parameters

	HSV210-SLIM	HSV210-SLIM-TWIN
Operating Mode	3-axis continuous	2 x 3-axis continuous
Speed	up to 200 bags/min	up to 400 bags/min
Max. dimension of cross seal	210 mm	
Max. film width	440 mm	
Electricity	3 x 400 V / 50 Hz	
Air pressure	0.6 MPa	

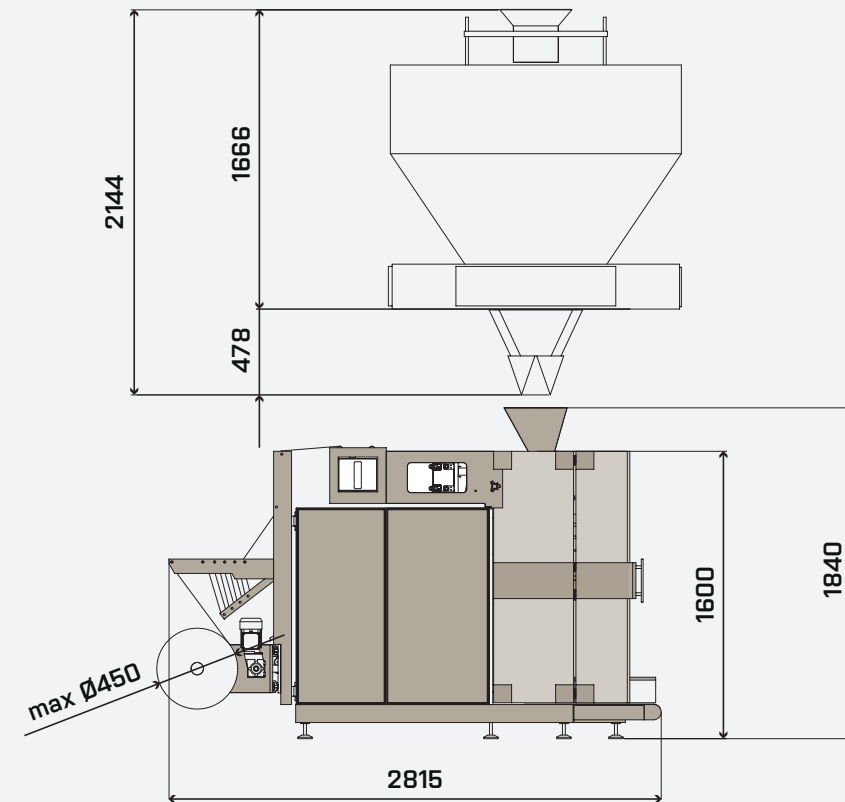




# Contacts

VELTEKO CZ s.r.o.  
K Borovičkám 1716  
258 01 Vlašim  
Czech Republic  
Tel. +420 317 846 473  
velteko@velteko.cz

VELTEKO POLSKA Sp. z o. o.  
Ul. Św. Michała 43  
61-119 Poznań  
Poland  
Tel. + 48 61 650 34 07  
velteko@velteko.pl

ООО «ВЕЛТЕКО РУС»  
4-ая Тверская-Ямская, д. 33/39  
125047 г. Москва  
Russia  
Тел. +7 495 799 93 78  
velteko@velteko.ru

## GLOBAL SALES NETWORK

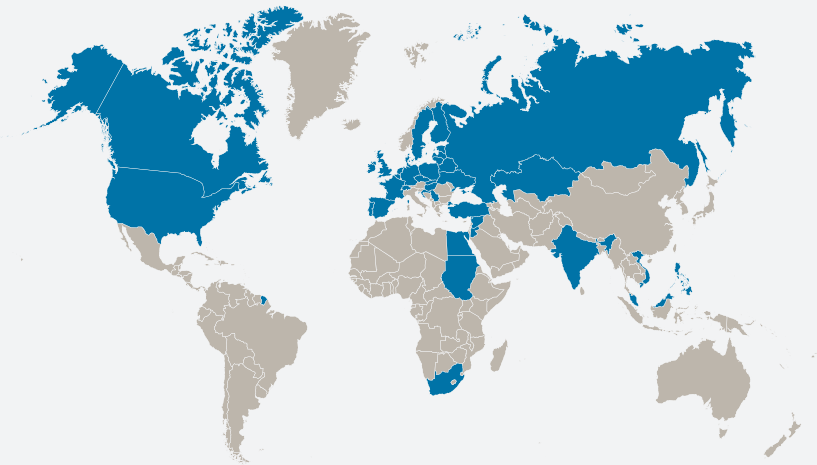

### MARKETS WHERE YOU CAN FIND VELTEKO DISTRIBUTORS

Your VELTEKO distributor

[www.velteko.com](http://www.velteko.com)

The contents of this catalog are not an offer for a contract, a promise to conclude a contract nor any legal proceedings by VELTEKO s.r.o. regardless of its content or denominations. VELTEKO s.r.o. reserves the right to change the specifications of machines that are illustrated and described in this catalog. Photos of machines are for informational purposes only and may contain optional accessories. Please contact your local distributor to receive an offer that is tailored to your requirements.

## More machines from our portfolio

### HSV280B

- One machine for more than 100 different variations of bags
- Maximum speed of 200 bags/min
- 5 – 45 min. changeovers to a different bag type
- More than 16 variations of standup pouches
- Max. dimension of cross seal 280 mm



### HSV360A-DUPLEX

- Maximum speed of 360 pillow or three-side sealed bags per minute
- Double tube design



**VELTEKO – The vertical packaging machine experts**