

VELTEKO

Vertical packaging
machine



VERSATILE-440

The versatility of Velteko machines allow for packaging your products into the widest variety of bags so you are prepared to face the constantly changing requests and challenges of the marketplace.

VERSATILITY

IT'S NOT JUST A BENEFIT...

IT'S A NECESSITY.



51

*different
types of bags*

16 variations
of standup pouches














10–60

*minute changeover
time between bags*



10
*applicators for
extended bag
functionality*



51 different types of bags



16 variations
of standup pouches



Wide Range of Applicators for Extended Bag Functionality



Zipper



Ultrazip



Resealable Flap



Label



External Degassing Valve



Internal Degassing Valve



Printers



Advertising tape

Intuitive user-friendly interface



5
languages

500
programs

USB
port

Ethernet

VPN
router

Data
Service

Optional
Bar Code
Reader

Camera



- ❑ *BECKHOFF industrial computer with 12" full color touch screen and extended connectivity (USB, RJ45)*
- ❑ *Optional Allen-Bradley control system*
- ❑ *Velteko software recommends operating parameters and displays interactive operational messages in your local language*
- ❑ *Audiovisual online support system service with IP camera for secure remote management and service analysis tools*
- ❑ *Instructional videos displayed on color touch screen*
- ❑ *Images from IP cameras located on the dosing metering device are displayed directly on the home screen*
- ❑ *Machine statistics available by default in the control panel*
- ❑ *Optional RFID system for easy identification*
- ❑ *Optional loading of parameters via barcodes*
- ❑ *Optional operational machine communication with Enterprise System Software*
- ❑ *VELTEKO DATASERVICE – Software tools for improved management and analysis of machine operation*

Technical Parameters



	VERSATILE-440-A
Method of operation	Intermittent
Speed	up to 50 bags/min.
Maximum width of bag	400 mm
Different types of bags	51
Maximum width of foil roll	1,100 mm
electricity	3 x 400 V / 50 Hz
air pressure	0.6 MPa

Standard Equipment

- ❑ Intermittent motion
- ❑ Robust stainless steel construction for maximum reliability and durability
- ❑ Branding components with worldwide availability
- ❑ Servo-driven cross jaws
- ❑ Vacuum-driven film draw-down belt
- ❑ Automatic film centering

Service & Guarantee

- ❑ Spare parts catalogue for your specific machine
- ❑ 12 month / unlimited hours warranty
- ❑ Extended service intervals for reduced cost of ownership
- ❑ 24/7 service available

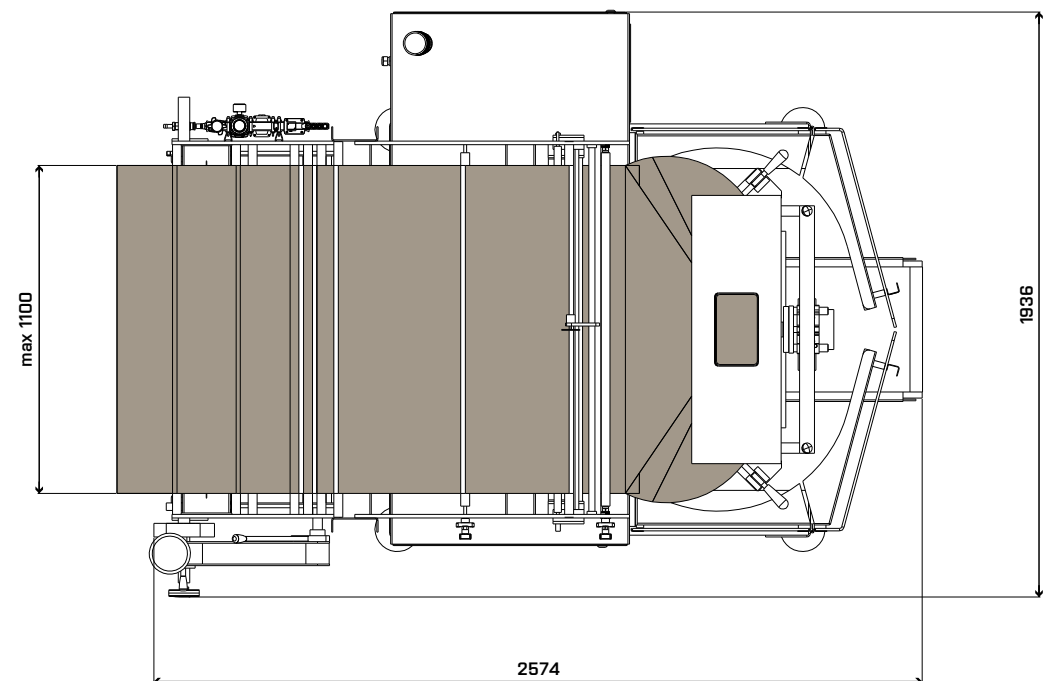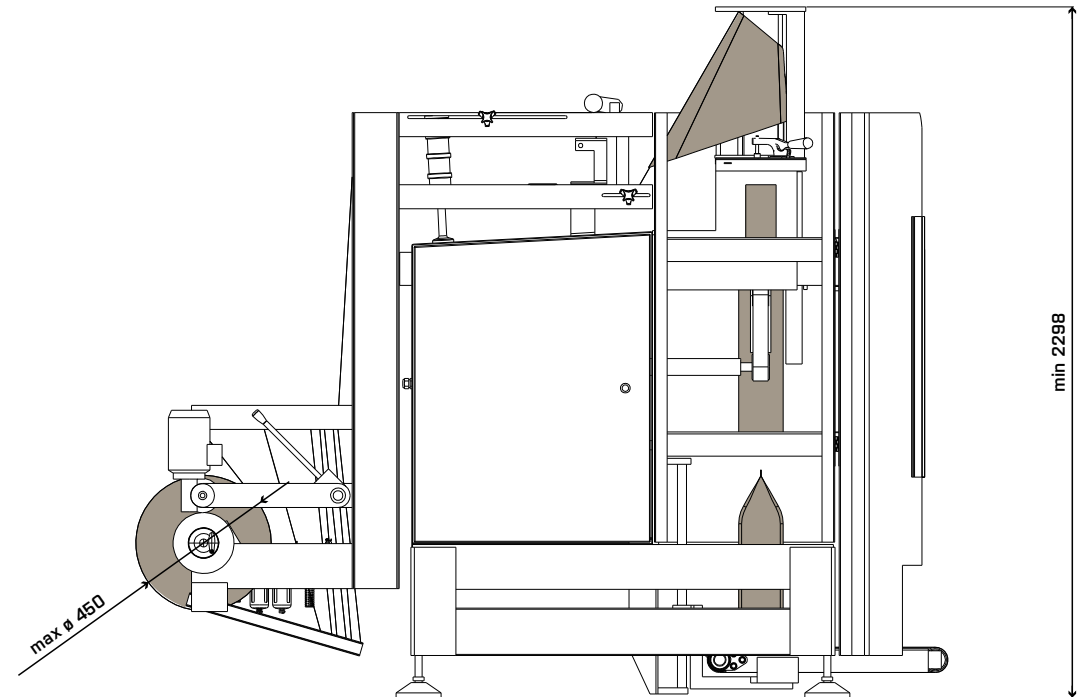


Contacts

VELTEKO CZ s.r.o.
K Borovičkám 1716
258 01 Vlašim
Czech Republic
Tel. +420 317 846 473
velteko@velteko.cz

VELTEKO POLSKA Sp. z o. o.
Ul. Św. Michała 43
61-119 Poznań
Poland
Tel. + 48 61 650 34 07
velteko@velteko.pl

ООО «ВЕЛТЕКО РУС»
4-ая Тверская-Ямская, д. 33/39
125047 г. Москва
Russia
Тел. +7 495 799 93 78
velteko@velteko.ru

GLOBAL SALES NETWORK

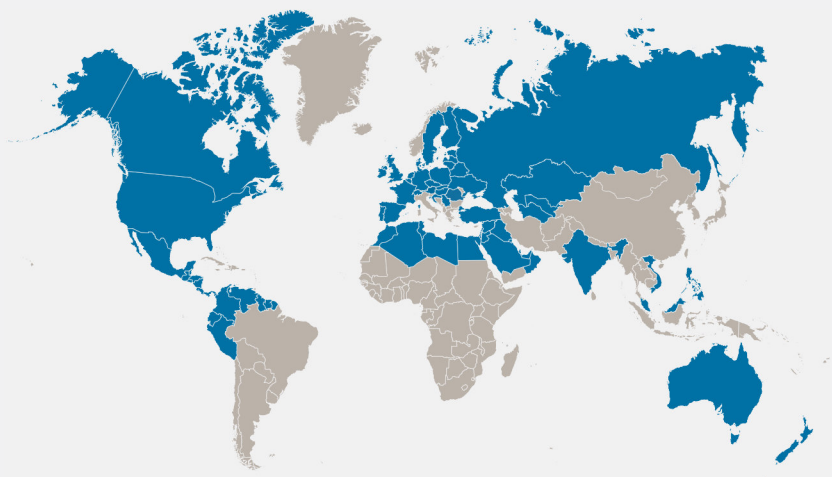

MARKETS WHERE YOU CAN FIND VELTEKO DISTRIBUTORS

Your VELTEKO distributor

www.velteko.com

The contents of this catalog are not an offer for a contract, a promise to conclude a contract nor any legal proceedings by VELTEKO s.r.o. regardless of its content or denominations. VELTEKO s.r.o. reserves the right to change the specifications of machines that are illustrated and described in this catalog. Photos of machines are for informational purposes only and may contain optional accessories. Please contact your local distributor to receive an offer that is tailored to your requirements.

More machines from our portfolio

US-100

- Up to 120 different bag types
- Tin Tie reclosing system
- Packaging of fragile products
- Custom product mixes



DUPLEX-360

- Maximum speed of 360 pillow or three-side sealed bags per minute
- Double tube design



VELTEKO – The vertical packaging machine experts